



PADDY
CLEANERS®

Ürün Kodu/Product Code /Код продукта
TURBO PAD 206

ÇELTİK AYIRMA MAKİNESİ
PADDY SEPARATOR MACHINE



BEYAMACHINE
SEED PROCESSING

FOTOSORTER®
RENK AYIRMA MAKİNESİ

RÉCOLTE
DUMONDE

EXCELL CLEANERS®

Fabrika/Factory: Mersin Tarsus 2. Organize Sanayi Bölgesi Rasim Dokur Bulvarı No: 19 Akdeniz MERSİN/TURKEY

www.selectionmachines.com


Gsm: +90 506 761 14 43

E-mail: yalcinokat@selectionmachines.com



TOHUM İYİLEŞTİRME VE İŞLEME TEKNOLOJİLERİ
SEED CONDITIONING & PROCESSING TECHNOLOGIES

MAKİNANIN TEKNİK RESİMİ
MACHINES TECHNICAL DRAWING

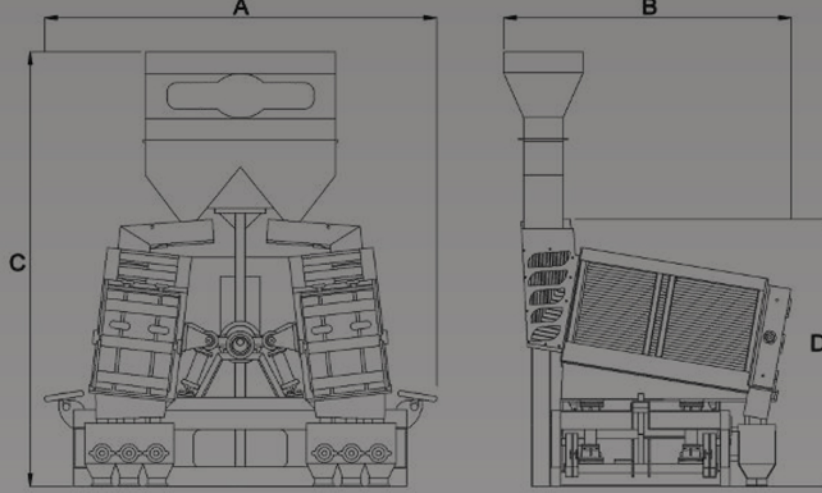

Teknik Özellikler Technical Specifications		Makina Ölçüleri Machine Dimensions				Hacim (M ³) Volume (M ³)	Ağırlık (Kg) Weight (Kg)
Kapasite / Capacity	Motor / Motor	A (mm)	B (mm)	C (mm)	D (mm)		
8000 Kg	2,2 KW	2300	1650	2820	1725	10,50	1460

INTENDED USE

The paddy separator machine uses a specially developed high efficiency recessed sieve system to separate cargo rice and paddy from each other according to their specific weight and product's outer surface structure.

APPLICATION FIELDS

Even though the paddy separator machines are specially designed to work in paddy processing plants, it works in lentil processing and seed separating plants.

FEATURES & ADVANTAGES

- High performance
- Minimum maintenance requirements
- Minimum needed supplies
- Compact design
- High processing capacity
- Stable operation
- Long life
- Maximum security
- Low power consumption
- Small installation area

TECHNICAL SPECIFICATIONS

- ✓ Vibrating machine is manufactured utilizing a systematic eccentric shaking feature.
- ✓ A total of 40 sieves in the machine are manufactured from stainless steel sieve.
- ✓ Machine has Plexiglas acrylic observation window for observing the distribution of the product on the sieves.
- ✓ The process of separating can easily be controlled and observed, and settings can easily be changed according to the humidity and type of the product.
- ✓ Different settings can be assigned to each way on this two-way machine.
- ✓ The machine frame is made of rectangular and cubic profiles welded together safely
- ✓ A product feed hopper can be found on the machine
- ✓ The supply bunker has 2 level control sensors, one top and one bottom. These sensors ensure the steady feed of the product to avoid unnecessary operation of the machine.
- ✓ The machines capacity is 8000 kg / hour based on the peeler machine's 95% peeling ratio
- ✓ Engine: 2,2 KW 900 rpm Motor

PADDY
CLEANERS®

Ürün Kodu/Product Code /Код продукта
TURBO PAD 206

ÇELTİK AYIRMA MAKİNESİ
PADDY SEPARATOR MACHINE



BEYAMACHINE
SEED PROCESSING

FOTOSORTER®
RENK AYIRMA MAKİNESİ

RECOLTE
DUMONDE

EXCELL CLEANERS®

Fabrika/Factory: Mersin Tarsus 2. Organize Sanayi Bölgesi Rasim Dokur Bulvarı No: 19 Akdeniz MERSİN/TURKEY

Gsm: +90 506 761 14 43

www.selectionmachines.com

E-mail: yalcinokat@selectionmachines.com

